




**UNITECHS'**

**ROLL COMPACTOR 250 x 100**

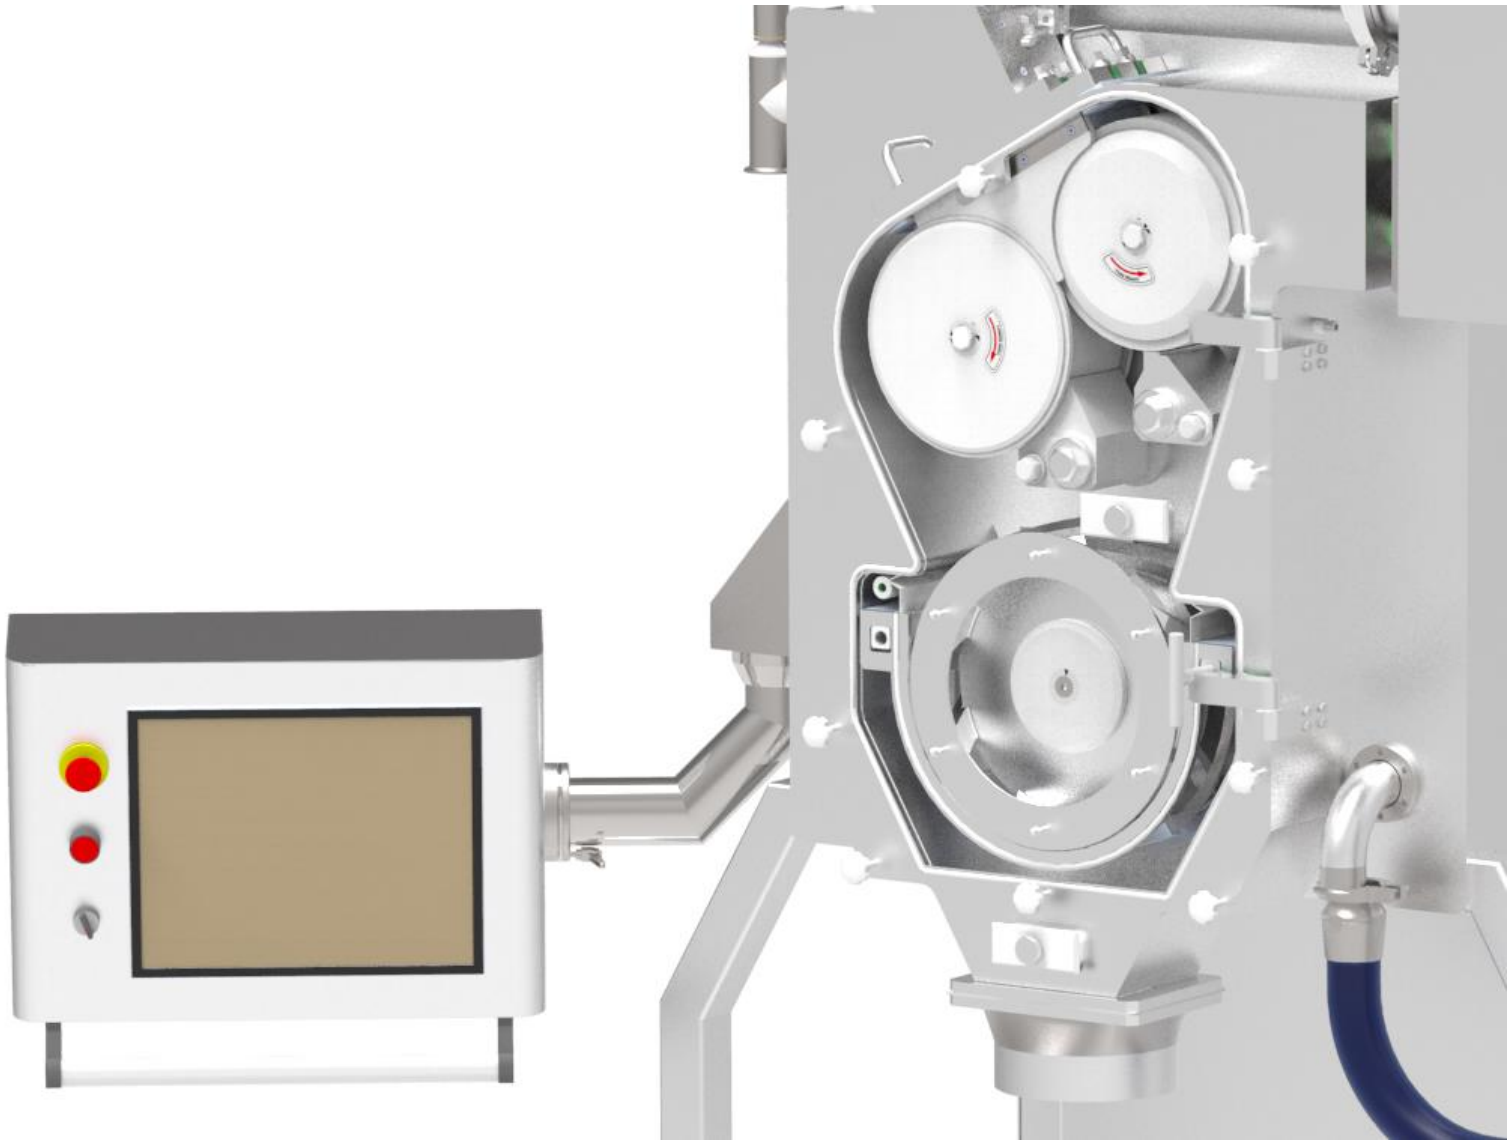

- **TECHNOLOGICAL BENEFITS**

- Sophisticated real world calibration & protocols
- Qualified force and gap measurement.
- Constant ribbon density.
- Different roller surface.
- Perfect gap seal system
- Easy scale-up to production.
- Press roll cooling.

- **UTILITY**

- **Electrical Power 415 VAC, 50 Hz, 3 Phase+N+E**
- **Power consumption 25 Kw**
- **Charging height :- 2750mm**
- **Discharging height : 1148mm**
- **Dimension :- 2400 L x 2200 W x 2940 H**
- **Compressed air 6 bar pressure PU8**
- **Chilled water 4 LPM @2 bar pressure.**

## **UNITECH's Mini Roll compactor**

### TECHNICAL SPECIFICATIONS

FEATURE	DETAILS
ROLL SIZE	Ø250 mm x 100 mm WIDTH
OUT PUT	10 TO 250 Kg/hour [Approx] Depending of powder & required Hardness.
ROLLER SURFACE	Plain / Corrugated / Knurled / Cross knurled As per Customer Requirement.
Gap between rolls	0.3 to 6 mm +/- 0.2 [settable thru manual revolving Handle]
Roll speed range	4 to 30 RPM
Feed screw horizontal speed	1 to 200 RPM
Feed screw incline speed	1 to 400 RPM
Oscillation granulation speed	1 to 150 RPM
Feed Hopper capacity	20 Litre Approx
PLC	Available
HMI	Available

**=FASTER / SMARTER / RELIABLE**

**=THE FASTEST WAY FROM THE**

**IDEA TO THE MARKET.**

#### **UNITECH MACHINERIES**

26, Shyam – 2 Industrial Hub, Nr. HOF,  
Moriya, Ahmedabad – 3822213

Call: - +91 9099051600, 9099139060,  
7874379495

E-mail:- machinery.unitech@gmail.com